

> PRODUCTS

Zeus Series

10W -70W



Sol Series

10W -35W



Venus Series

5W -20W



Apollo Series

10W -40W



Athena Series

12W -15W



Diana Series

5W -7W



Vitoria Series

10W -30W



C Series

24W -35W




Argos Series

24W -35W



Medusa Series

10W -40W



Sky Series

10W -40W



> Brand of LED driver

LiFud **PHILIPS** **AGT** **EOKE** **TRIDONIC**

> Dimming : 0/1-10V、PWM、TRAIC、DALI、ZigBee

> Emergency device

Liangyang Electronic Technology CO., Ltd
Add: BoLinTai Industrial Park ,No. 1 Rd., 1st Industrial Zone, Baihua,Guangming
St., Guangming, Shenzhen,Guangdong, China
Mail: sales@liangyangtech.com

liangYang

Zeus Series

Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Zeus Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-Z-10W	10W	Ø 85×55	Ø 75-80	AC180-240V	1000lm	15°/24°/36°/50°
LY-DL-Z-16W	16W	Ø 110×65	Ø 95-100	AC180-240V	1600lm	15°/24°/36°/50°
LY-DL-Z-22W	22W	Ø 140×75	Ø 120-125	AC180-240V	2200lm	15°/24°/36°/50°
LY-DL-Z-30W	30W	Ø 160×85	Ø 140-145	AC180-240V	3000lm	15°/24°/36°/50°
LY-DL-Z-40W	40W	Ø 185×95	Ø 160-165	AC180-240V	4000lm	15°/24°/36°/50°
LY-DL-Z-65W	65W	Ø 215×108	Ø 190-195	AC180-240V	6500lm	15°/24°/36°/50°



Sol Series

Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Sol Series

	Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
	LY-DL-S-12W	12W	Ø 90×85	Ø 80-85	AC180-240V	1200lm	15°/24°/36°
	LY-DL-S-20W	20W	Ø 115×105	Ø 100-105	AC180-240V	2000lm	15°/24°/36°
	LY-DL-S-35W	35W	Ø 135×125	Ø 115-120	AC180-240V	3500lm	15°/24°/36°





Venus Series


Adopt high quality LED light source with high display, high luminous efficiency and high illumination, presenting the color and lustre of the illuminated object.



Venus Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-V-5W	5W	Ø 65×55	Ø 55	AC180-240V	500lm	15°/24°/36°
LY-DL-V-10W	10W	Ø 85×55	Ø 75	AC180-240V	1000lm	15°/24°/36°
LY-DL-V-20W	20W	Ø 100×85	Ø 85	AC180-240V	2000lm	15°/24°/36°



Apollo Series


Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Apollo Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-A-10W	10W	Ø 85×60	Ø 75	AC180-240V	1000lm	15°/24°/36°
LY-DL-A-20W	20W	Ø 110×80	Ø 95	AC180-240V	2000lm	15°/24°/36°
LY-DL-A-30W	30W	Ø 140×90	Ø 120	AC180-240V	3000lm	15°/24°/36°
LY-DL-A-40W	40W	Ø 160×105	Ø 140	AC180-240V	4000lm	15°/24°/36°



Athena Series


Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Athena Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-A-12W	12W	Ø 85×75	Ø 75	AC180-240V	1200lm	15°/24°/36°
LY-DL-A-15W	15W	Ø 85×85	Ø 75	AC180-240V	1500lm	15°/24°/36°



Diana Series


Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Diana Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-D-7W	7W	Ø 85×40	Ø 75	AC180-240V	700lm	15°/24°/36°
LY-DL-D-15W	15W	Ø 108×50	Ø 95	AC180-240V	1500lm	15°/24°/36°
LY-DL-D-24W	24W	Ø 138×60	Ø 120	AC180-240V	2400lm	15°/24°/36°

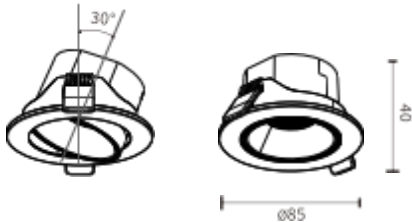

Vitoria Series



Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Vitoria Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-V-12W	12W	Ø 90×100	Ø 78	AC180-240V	1200lm	15°/24°/36°
LY-DL-V-30W	30W	Ø 135×120	Ø 118	AC180-240V	3000lm	15°/24°/36°



C Series

Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



C Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-C-30W	30W	Ø 140×100	Ø 125	AC180-240V	3000lm	15°/24°/36°




Argos Series

Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Argos Series

Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-A2-4W	4W	63*41*41 mm	58*35 mm	AC180-240V	400lm	15°/24°/36°
LY-DL-A4S-8W	8W	68*63*41 mm	64*53 mm	AC180-240V	800lm	15°/24°/36°
LY-DL-A4L-8W	8W	113*41*41 mm	109*35 mm	AC180-240V	800lm	15°/24°/36°
LY-DL-A6-12W	12W	163*41*41 mm	158*35 mm	AC180-240V	1200lm	15°/24°/36°
LY-DL-A12-24W	24W	313*41*41 mm	307*35 mm	AC180-240V	2400lm	15°/24°/36°

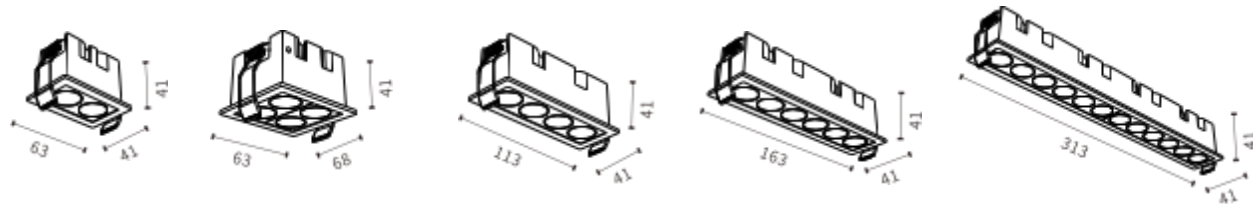

Medusa Series





Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Medusa Series



Model	Power	Size	Hole size	Voltage	Lumen	Beam Angle
LY-DL-M1-12W	12W	85*85*60 mm	75*75 mm	AC180-240V	400lm	15°/24°/36°
LY-DL-M2-24W	24W	167*85*60 mm	157*75 mm	AC180-240V	800lm	15°/24°/36°
LY-DL-M3-36W	36W	255*85*60 mm	245*75 mm	AC180-240V	800lm	15°/24°/36°
LY-DL-M4-48W	48W	170*170*60 mm	162*162 mm	AC180-240V	1200lm	15°/24°/36°



Sky Series

Adopt high quality aluminum material, die-casting process, air convection design, thermal conductivity wall, good heat dissipation, ensure the radiator to play high quality efficiency, guarantee the life of the light source.



Sky Series



型号	额定功率	匹配光源	产品尺寸	灯体颜色	光束角
60经典导轨灯	15W	1512-020	ø60×135	黑色/白色	15°/24°/36°
70经典导轨灯	20W	1512-020	ø70×135	黑色/白色	15°/24°/36°
80经典导轨灯	30W	1820-020	ø80×145	黑色/白色	15°/24°/36°

